


SUNJIN VIBRO HAMMER

tilting type S250T - S350T



Vibro Hammer Tilt S250T - S350T Applications

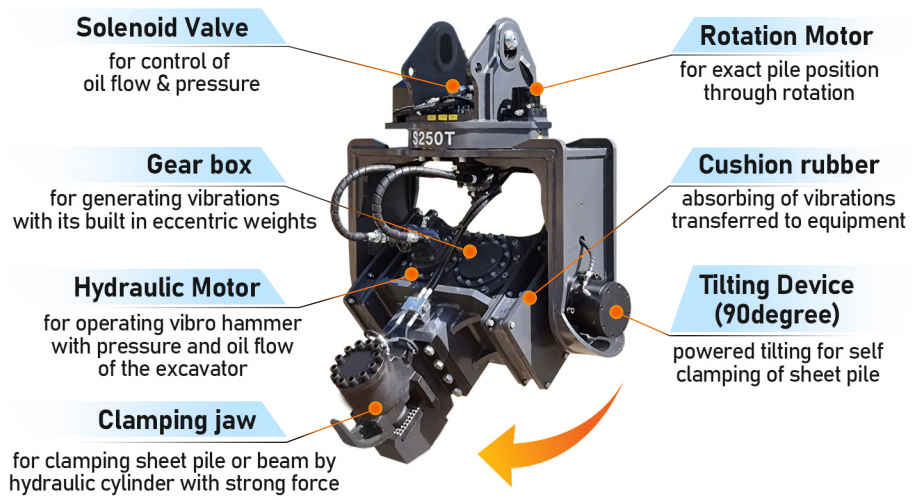

Description	S250T	S350T
Eccentric Moment	6.1kg.m (530in lbs)	10.0kg.m (870in lbs)
Max. Centrifugal Force	640 kN	900 kN
Max. Amplitude	8mm/0.31inch	12mm/0.40inch
Max. Frequency	2,700 rpm	2,700 rpm
Max. Operating oil flow	170 ~ 210 l/min	180 ~ 220 l/min
Max. Oper. Oil Pressure	200 ~ 250 bar (2,900 ~ 3,625 psi)	270 ~ 320 bar (3,916 ~ 4,640 psi)
Rotation	360 degree	360 degree
Clamping Jaw	50 mm	50 mm

Vibro Hammer Tilt S250T - S350T Construction Photo

